

MP ROTATOR®

Design Guide

High-Efficiency, Multi-Stream Nozzle

Hunter®



Product Introduction

Reliable Operation

Patented double-pop nozzle keeps the sprinkler free of external debris.

Efficient Application

Multiple rotating streams provide even coverage and wind resistance, eliminating dry spots.



Pressure Regulation

For best results, use the pressure-regulated Pro-Spray® PRS40.



Accurate Adjustments

Arc and radius can be adjusted while maintaining matched precipitation. Radius can be reduced up to 25%.



Durable

Removable inlet filter keeps sprinkler free of internal debris.

Easy Installation


Compatible with all Hunter spray bodies—perfect for retrofits. Use the MP-HT for female-threaded spray bodies.

MATCHED PRECIPITATION

MP Rotators now come in two precipitation rate options to provide maximum flexibility for your irrigation design.


Standard MP Rotator Precipitation Rate

The Standard MP Rotator has the slowest precipitation rate in the industry at approximately 0.4 in/hr, preventing runoff in the majority of soil applications, and allowing for gentle hydration of the landscape.

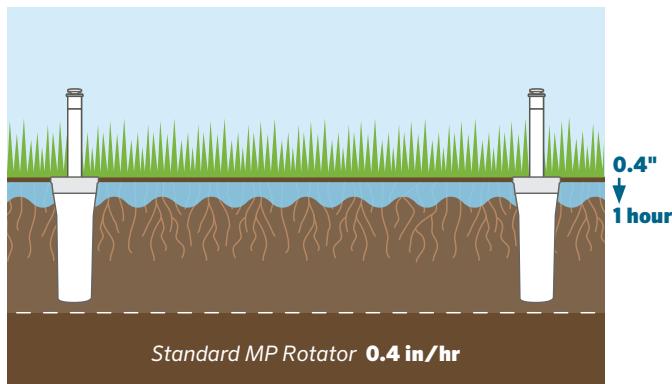

MP800 Precipitation Rate

The MP800 has a precipitation rate of approximately 0.8 in/hr, allowing for high-efficiency irrigation of small spaces and medium-grade soils.

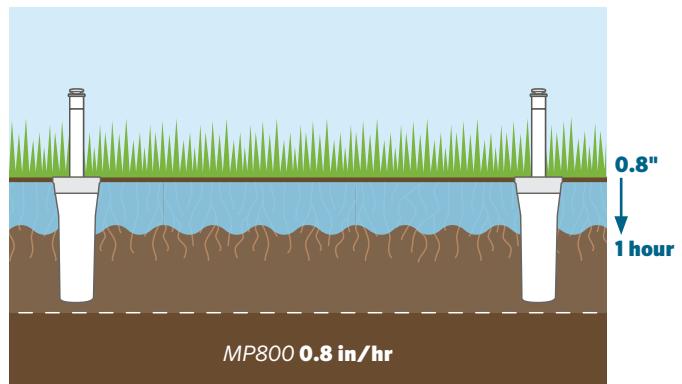

Matching Soil Intake Rates

Matching your precipitation rate to your soil intake rate will eliminate the hazards of runoff and help conserve water. With two different precipitation rate options with the MP Rotator, you can now choose the best high-efficiency rotary nozzle for your plant material, soil type, and slope.

- Standard MP Rotators deliver water slowly, at a rate that most soils and slopes can effectively absorb.
- The MP800 delivers water at half the rate of a spray nozzle, better matching typical soil intake rates.
- Standard sprays apply water at a rate much higher than most soils can absorb, causing runoff in most soil types.

INFILTRATION RATES BY SOIL TYPE

	SLOPE PERCENTAGE			
	0-5%	5-8%	8-12%	>12%
COARSE SAND	● ●	● ●	● ●	●
FINE SAND	● ●	● ●	●	-
SANDY LOAM	● ●	●	●	-
FINE SANDY LOAM	● ●	●	-	-
LOAM/SILT LOAM	●	●	-	-
CLAY/CLAY LOAM	●	-	-	-

Water infiltration into the soil is less than:

- 1.5 in/hr
- 1 in/hr
- 0.5 in/hr
- [-] Cycle and Soak required to avoid runoff

MP ROTATOR DESIGN GUIDE

Application

① MP Rotator Application


Specify the MP Rotator as the desired nozzle in a spray head body.

Retrofit spray systems by installing the MP Rotator onto any conventional spray head or shrub adapter.

② Radius Adjustment

All models of the MP Rotator allow for easy radius adjustment of up to 25% while maintaining automatic matched precipitation.

Turn the nozzle adjustment screw clockwise to reduce the radius or counterclockwise to increase the radius. Four full rotations will maximize the effect. Additional rotations will not affect the performance of the nozzle.

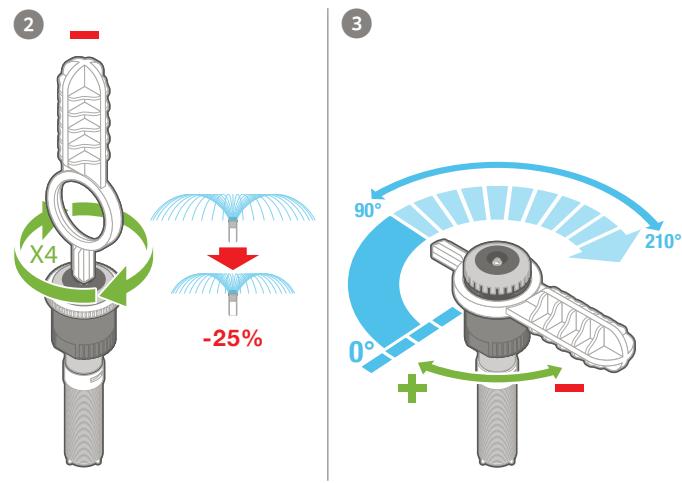

③ Arc Setting

The MP Rotator has a fixed left edge on all 90°–210° models and 210°–270° models. Turn the adjustment ring clockwise to increase the arc, and turn the adjustment ring counterclockwise to decrease the arc.



MP ROTATOR FACTORY SETTINGS

New MP Rotators are shipped from the factory at the maximum radius setting and with the following arc settings:

MP MODEL	FACTORY SET ARC
90°–210°	180°
210°–270°	210°
360°	Full-circle
MP Corner	45°
MP Side Strip	180°
MP Left Corner Strip	90°
MP Right Corner Strip	90°

MP ROTATOR NOZZLE HEIGHT AND TRAJECTORY

Nozzle No.	Pressure (PSI)	Degrees of Trajectory	Max. Height of Spray
MP815	40	15°	12"
MP800SR	40	18°	18"
MP1000	40	20°	20"
MP2000	40	26°	45"
MP3000	40	26°	79"
MP3500	40	26°	79"
MP Corner	40	14°	14"
MP Side Strip	40	16°	19"
MP Left Corner Strip	40	16°	18"
MP Right Corner Strip	40	16°	18"

MP ROTATOR DESIGN GUIDE

Layout and Placement

Run Times

Because the MP Rotator applies less water with increased uniformity, simply doubling the run time used for traditional spray nozzles may supply sufficient water to the landscape while using less water overall.

You can also calculate the run time based on the lower precipitation rate.

Visit www.hunterindustries.com/tools/runtime for more information on run time calculations.

Precipitation Rate Calculations


MP Rotators are recommended for use with head-to-head coverage in either square or triangular layouts.

Square Spacing Application Rate

$$\frac{96.25 \times GPM \text{ of } 360^\circ \text{ sprinkler}}{(Head \text{ spacing} \times Row \text{ spacing})}$$

Example:

$$\frac{96.25 \times 1.48 \text{ GPM}}{(19' \times 19')} = \frac{142.45}{361} = 0.39 \text{ in/hr}$$

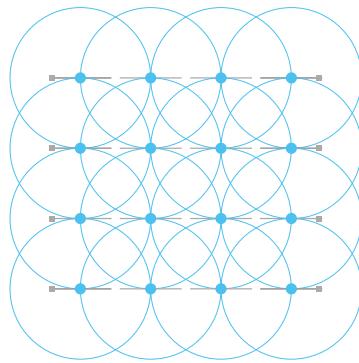

19' Square Spacing


MP2000-360
40 PSI
19' Radius
1.48 GPM
19' Head x 19' Row,
Square Spacing

Equilateral Triangular Spacing Application Rate

$$\frac{96.25 \times GPM \text{ of } 360^\circ \text{ sprinkler}}{(Head \text{ spacing} \times Head \text{ spacing}) 0.866}$$

Example:

$$\frac{96.25 \times 3.64 \text{ GPM}}{(30' \times 30') 0.866} = \frac{350.35}{(900) 0.866} = \frac{350.35}{779.4} = 0.45 \text{ in/hr}$$

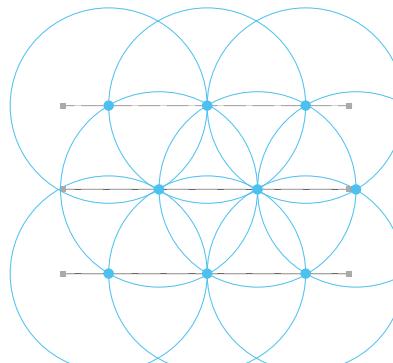

30' Triangular Spacing

MP3000-360
40 PSI
30' Radius
3.64 GPM
30' Head x 26' Row,
Triangular Spacing


Note: Equilateral triangular spacing has a higher application rate than square spacing due to less area per sprinkler.

Zoning with the MP Rotator

The standard MP Rotators have a matched precipitation rate of approximately 0.4 in/hr. This means any standard MP Rotator at any arc or radius can be placed on the same zone.

The MP800SR can be configured to work well in head-to-head coverage in either square or triangular layouts. When square spacing is used, the resulting precipitation rate will be approximately 0.8 in/hr.

Since this precipitation rate differs from the standard line of MP Rotators, you should zone the MP800 family separately to maintain matched precipitation within each zone.

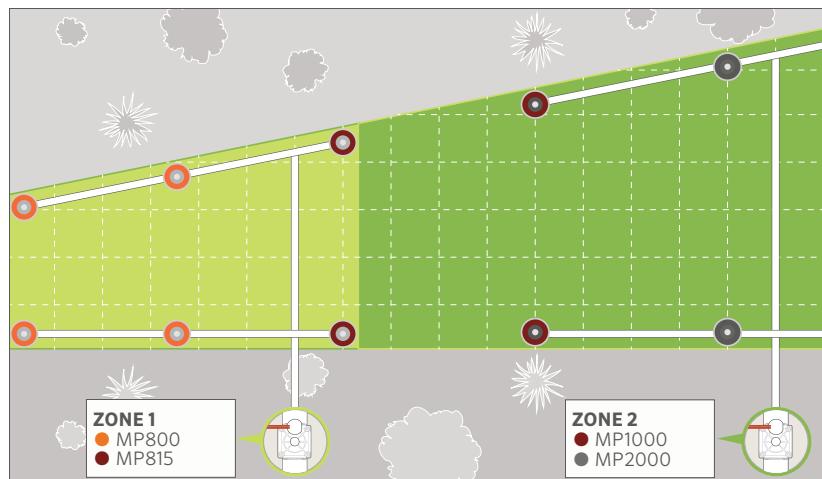

MP ROTATOR DESIGN GUIDE


MP800



Matched Precipitation

Maximize water savings for tight spaces with the MP800. The MP800 offers the benefits of multi-stream, multi-trajectory technology in smaller areas than ever before. The MP800 delivers water to distances as short as 6' at a matched precipitation rate of approximately **0.8 in/hr**, less than half that of traditional spray nozzles.

Radius

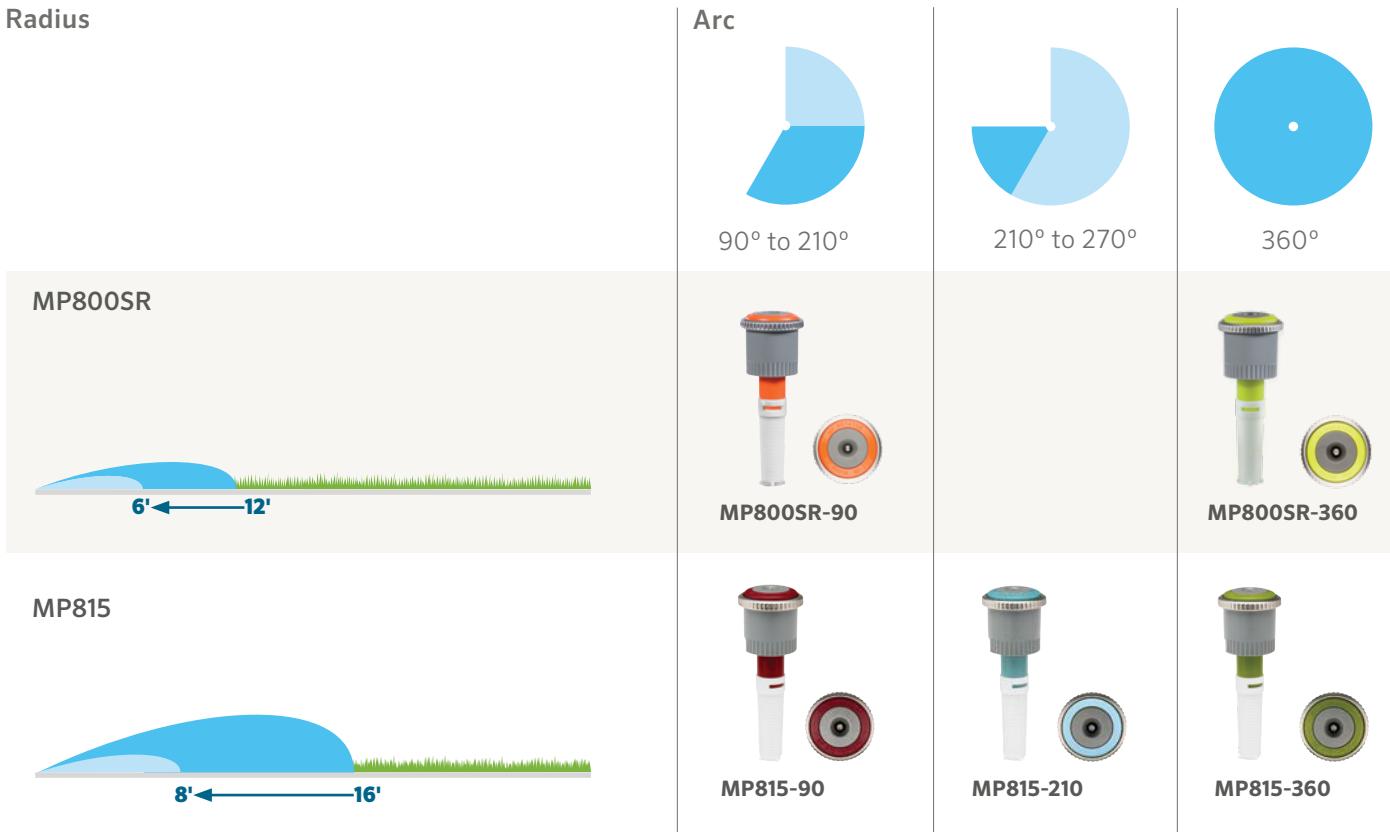

Pressure Ratings

The MP800, just like its larger family of MP Rotators, prefers 40 PSI for optimal performance. This pressure yields optimal results for coverage and distribution uniformity. **However, to achieve the lowest radius setting of 6', you must regulate the inlet pressure to 30 PSI.** Use a Pro-Spray PRS30 to achieve a consistent inlet pressure of 30 PSI.

Pro-Spray PRS30

Pair the MP Rotator with a Pro-Spray PRS30 to achieve the minimum radius.



Pro-Spray PRS40

Pair the MP Rotator with a Pro-Spray PRS40 for peak performance.



MP ROTATOR DESIGN GUIDE

MP1000, MP2000, MP3000, MP3500



Matched Precipitation

All standard MP Rotator nozzles have a matched precipitation rate of approximately **0.4 in/hr** across the radius range of 8' to 35'.

Radius	Arc	MP1000	MP2000	MP3000	MP3500
8'	90° to 210°				
15'	210° to 270°				
30'	360°				
35'					


MP ROTATOR DESIGN GUIDE

Side Strip and Corner Models



Side Strip Precipitation Example

The precipitation rate of the MP Strips is dependent on the layout of the system. The following is an example of a potential design and associated precipitation rate:

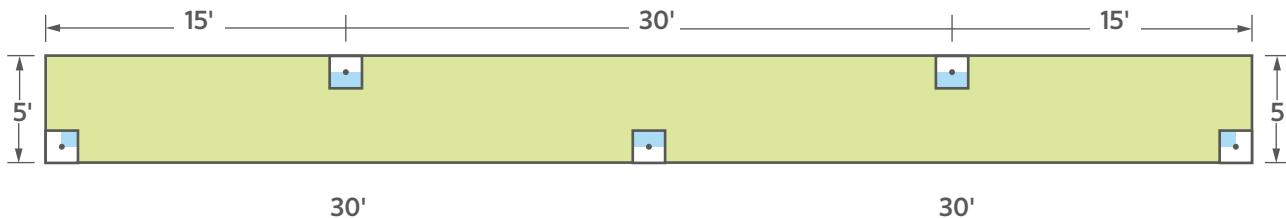

Precipitation Rate Using Total Area Method

$$P = \frac{96.25 \times \text{Total Flow (GPM)}}{\text{Total Area (ft)}}$$

$$P = \frac{96.25 \times (0.22 + 0.44 + 0.44 + 0.44 + 0.22)}{5' \times 60'}$$

$$P = 0.56 \text{ in/hr}$$



MPLCS515
(Left Strip)



MPSS530
(Side Strip)





MPRC5515
(Right Strip)

MP Corner

The MP Corner is specially designed to provide extra coverage in tight corners so that neighboring heads do not need to reach into the corner to provide head-to-head coverage, avoiding unnecessary overspray onto non-target areas.



MPCorner

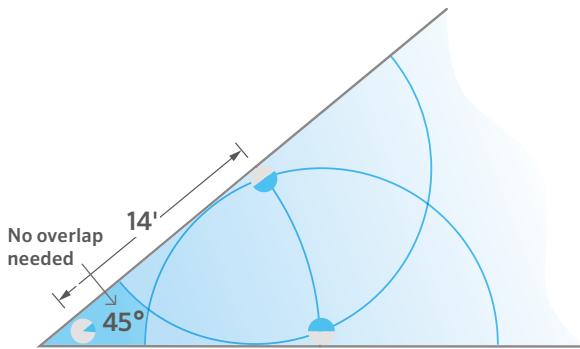

MP ROTATOR DESIGN GUIDE



Uniformity

Uniformity Samples



The various streams of the MP Rotator allow it to target all areas of the landscape evenly when properly installed, yielding superior uniformity over traditional spray nozzles. Several independent studies demonstrate this difference and other efficiency benefits of the MP Rotator. Read more at hunterindustries.com/site-studies.

Below is a sampling of MP Rotator profiles and associated uniformities. These uniformity examples result from tests performed indoors in controlled conditions. On-site conditions will affect actual uniformity, and the uniformity data may change due to continuing product development.



MP1000 90-210 180° at 40 PSI

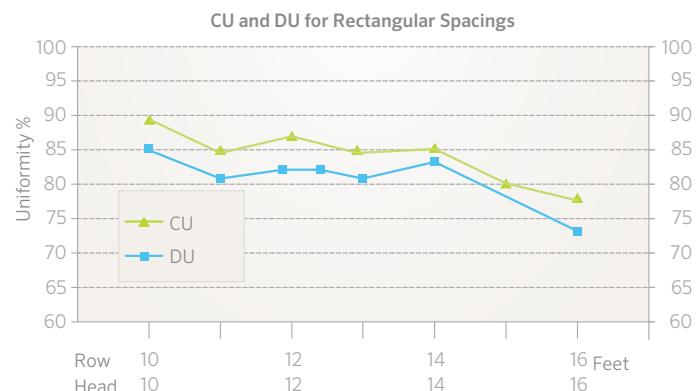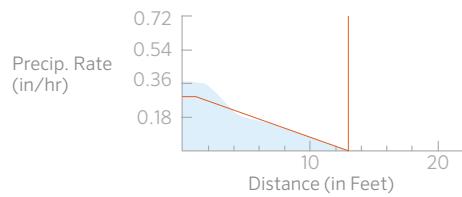

MP2000 90-210 180° at 40 PSI

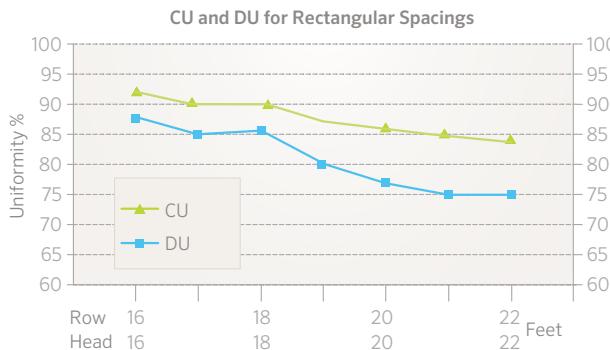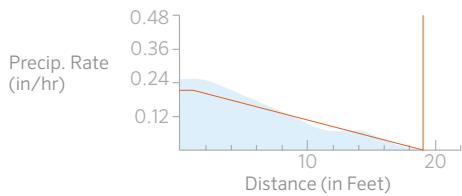

MP3000 90-210 180° at 40 PSI

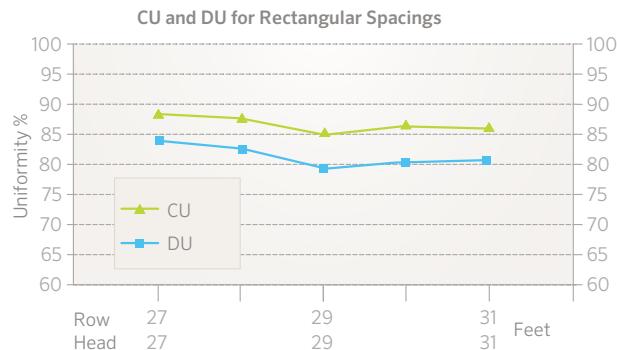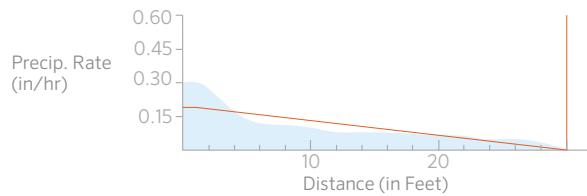

MP ROTATOR DESIGN GUIDE


Cost and Water Savings

Lower System Cost


A design with MP Rotator nozzles uses far less material and equipment than a traditional spray design, resulting in an overall reduced project cost. Due to the lower flow rates, more heads can be run at once, reducing the number of valves needed.

Learn more about how the MP Rotator provides material and labor savings in this residential site study:
<http://hunter.direct/mprotatorss>.

Design Using Traditional Sprays

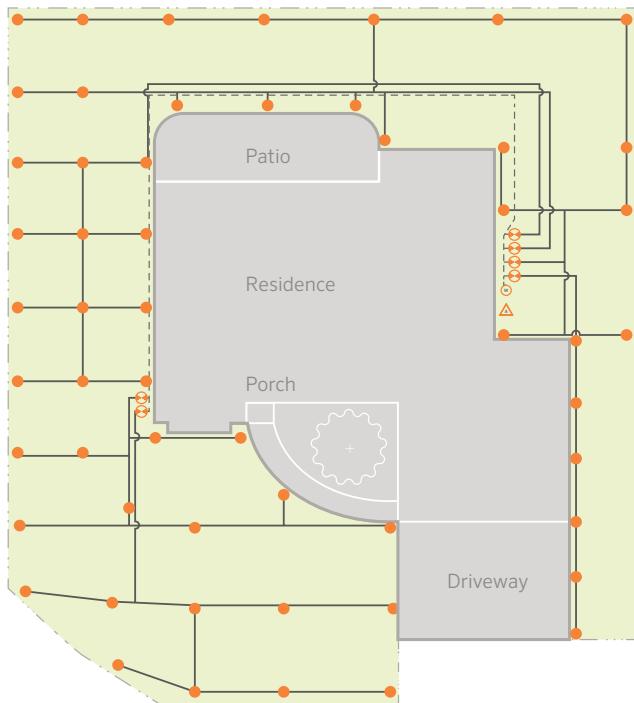

Design Using MP Rotators

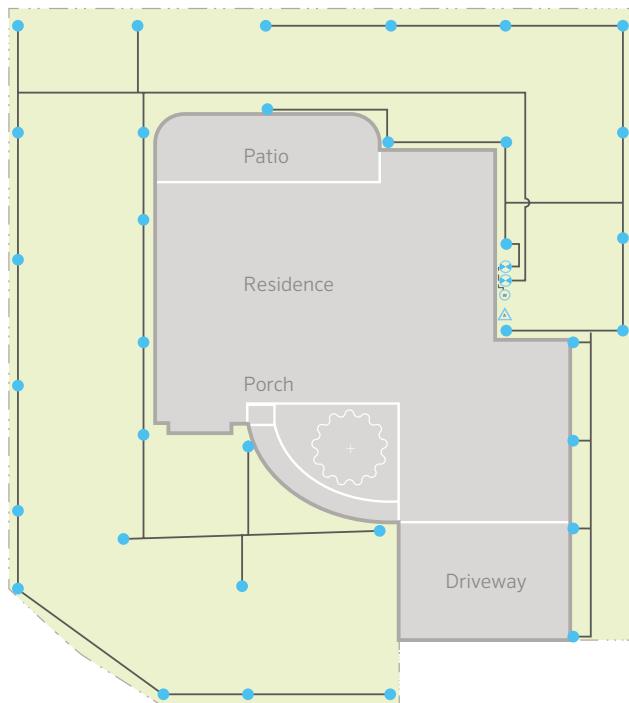

IRRIGATION SYSTEM COST COMPARISON

Materials Needed	With Sprays
Valves	6
Mainline	150'
Laterals	800'
Sprinklers	55
Controller	6-Station
Wire	175'
SPRAY COST	\$\$\$\$

IRRIGATION SYSTEM COST COMPARISON

Materials Needed	With MP Rotators
Valves	2
Mainline	15'
Laterals	600'
Sprinklers	34
Controller	4-Station
Wire	20'
MP ROTATOR COST	\$\$

MP ROTATOR DESIGN GUIDE

Filtration Recommendations and Wastewater Applications

Filtration Guidelines

You should use primary filtration when operating with dirty water.

A general rule is to use primary filtration that is five times the mesh rating of the nozzle filter. For example, if the nozzle filter is 20 mesh, the primary filter should be 100 mesh.

Field testing has shown that the MP800SR runs well in dirty water conditions with the use of a 120-mesh primary filtration system.

NOZZLE FILTER SIZES	
Nozzle	Screen Size (mesh)
MP1000	40
MP2000	40
MP3000	20
MP3500	20
MP Strips and Corner	40
MP800SR-90	60
MP800SR-360	40
MP815	40

HY-100, HY-100-75, HY-075

Height: 6"

Width: 3"

Depth: 5"



Hunter's HY filters with 150-mesh size are a great solution for zone-specific MP800SR arrangements.

Reclaimed Wastewater

The MP Rotator is an excellent choice when using reclaimed wastewater. The materials used in the MP Rotator are chemical-resistant polypropylene, polyurethane, acetal plastics, stainless steel, and EPDM rubber. These materials are designed to withstand the chemicals and conditions commonly used in wastewater irrigation.

MP ROTATOR DESIGN GUIDE

MP800



MP ROTATOR PERFORMANCE DATA

MP800SR

Radius: 6' to 12'
Adjustable Arc and Full-Circle
● Orange and Gray: 90° to 210°
● Lime Green and Gray: 360°

Arc	Pressure PSI	MAX RADIUS				MIN RADIUS	
		Radius ft.	Flow GPM	Flow GPH	Precip in/hr ■ ▲	Radius ft.	Flow GPM
90°	30	8	0.17	9.6	0.90 0.23	10	0.13
	35	9	0.21	11.4	0.89 0.42	11	0.15
	40	10	0.23	13.8	0.83 0.42	8	0.16
	45	11	0.25	15.0	0.80 0.79	9	0.18
	50	11	0.27	16.2	0.92	9	0.19
	55	12	0.28	16.8	0.93	10	0.20
180°	30	8	0.33	19.2	0.88 0.42	6	0.26
	35	9	0.38	22.2	0.85 0.42	7	0.29
	40	10	0.42	25.2	0.81 0.93	8	0.32
	45	11	0.46	27.6	0.77 0.88	8	0.36
	50	11	0.48	28.8	0.76 0.88	9	0.38
	55	12	0.50	30.0	0.73 0.84	10	0.40
210°	30	8	0.35	22.2	0.80 0.43	6	0.30
	35	9	0.38	26.4	0.77 0.43	7	0.34
	40	10	0.43	29.4	0.81 0.91	8	0.37
	45	10	0.45	31.8	0.82 0.95	8	0.42
	50	11	0.49	33.6	0.73 0.85	9	0.44
	55	12	0.56	34.8	0.70 0.81	10	0.47
360°	30	8	0.66	37.8	0.89 0.78	6	0.47
	35	9	0.71	42.0	0.80 0.78	7	0.52
	40	10	0.78	46.8	0.79 0.91	8	0.56
	45	10	0.85	51.0	0.78 0.90	8	0.59
	50	11	0.88	52.8	0.73 0.85	9	0.63
	55	12	0.98	58.8	0.70 0.81	10	0.70

Due to its precipitation rate of approximately 0.8 in/hr, we strongly recommend zoning the MP800 separately from the Standard MP Rotator.

MP ROTATOR PERFORMANCE DATA

MP815

Radius: 8' to 16'
Adjustable Arc and Full-Circle
● Maroon and Gray: 90° to 210°
● Lt. Blue and Gray: 210° to 270°
● Olive and Gray: 360°

Arc	Pressure PSI	Radius ft.	Flow GPM	Flow GPH	Precip in/hr ■ ▲
90°	30	14	0.42	25.2	0.83 0.95
	35	15	0.46	27.6	0.79 0.91
	40	15	0.49	29.4	0.84 0.97
	45	16	0.52	31.2	0.78 0.90
	50	16	0.55	33.0	0.83 0.96
	55	16	0.58	34.8	0.87 1.01
180°	30	13	0.75	45.0	0.85 0.99
	35	14	0.86	51.6	0.84 0.98
	40	15	0.93	55.8	0.80 0.92
	45	15	0.96	57.6	0.82 0.95
	50	16	1.06	63.6	0.80 0.92
	55	16	1.11	66.6	0.83 0.96
210°	30	13	0.88	52.8	0.86 0.99
	35	14	0.96	57.6	0.81 0.93
	40	15	1.10	66.0	0.81 0.93
	45	15	1.16	69.6	0.85 0.98
	50	16	1.24	74.4	0.80 0.92
	55	16	1.30	78.0	0.84 0.97
270°	30	13	1.14	68.4	0.87 1.00
	35	14	1.24	74.4	0.81 0.94
	40	15	1.40	84.0	0.80 0.92
	45	15	1.47	88.2	0.84 0.97
	50	16	1.54	92.4	0.77 0.89
	55	16	1.61	96.6	0.81 0.93
360°	30	13	1.52	91.2	0.87 1.00
	35	14	1.70	102.0	0.83 0.96
	40	15	1.87	112.2	0.80 0.92
	45	15	2.00	120.0	0.86 0.99
	50	16	2.13	127.8	0.80 0.92
	55	16	2.26	135.6	0.85 0.98

PERFORMANCE DATA NOTE FOR ALL CHARTS:

Bold = Recommended Pressure.

The MP Rotator is designed to maintain matched precipitation after radius adjustment. Optimal pressure for the MP Rotator is 40 PSI. This can be achieved easily by using the MP Rotator with the Pro-Spray PRS40 Spray Body, pressure regulated at 40 PSI.

MP ROTATOR DESIGN GUIDE

MP1000, MP2000, MP3000, MP3500



MP ROTATOR PERFORMANCE DATA																				
MP1000							MP2000							MP3000						
Arc	Pressure PSI	Radius		Flow		Precip in/hr ■ ▲	Radius	Flow		Flow		Precip in/hr ■ ▲	Radius	Flow		Flow		Precip in/hr ■ ▲		
		ft.	GPM	GPH			ft.	GPM	GPH	GPM	GPH			ft.	GPM	GPH	GPM	GPH		
90°	25	--	--	--	--		17	0.34	20.4	0.45	0.52		25	0.71	42.6	0.44	0.51			
	30	12	0.17	10.2	0.45		18	0.38	22.8	0.45	0.52		27	0.76	45.6	0.40	0.46			
	35	13	0.19	11.4	0.43		19	0.40	24.0	0.43	0.49		28	0.82	49.2	0.40	0.46			
	40	14	0.21	12.6	0.41		20	0.43	25.8	0.41	0.48		30	0.86	51.6	0.37	0.42			
	45	14	0.23	13.8	0.45		21	0.46	27.6	0.40	0.46		30	0.90	54.0	0.39	0.44			
	50	15	0.25	15.0	0.43		21	0.47	28.2	0.41	0.47		30	0.95	57.0	0.41	0.47			
	55	15	0.27	16.2	0.46		21	0.48	28.8	0.42	0.48		30	1.01	60.6	0.43	0.50			
180°	25	--	--	--	--		16	0.6	36.0	0.45	0.52		25	1.44	86.4	0.44	0.51			
	30	12	0.34	20.4	0.45		17	0.64	38.4	0.43	0.49		27	1.58	94.8	0.42	0.48			
	35	13	0.38	22.8	0.43		18	0.71	42.6	0.42	0.49		28	1.70	102.0	0.42	0.48			
	40	14	0.42	25.2	0.41		19	0.77	46.2	0.41	0.47		30	1.82	109.2	0.39	0.45			
	45	14	0.44	26.4	0.43		20	0.85	51.0	0.41	0.47		30	1.93	115.8	0.41	0.48			
	50	15	0.50	30.0	0.43		21	0.91	54.6	0.40	0.46		30	2.04	122.4	0.44	0.50			
	55	15	0.51	30.6	0.44		21	0.95	57.0	0.41	0.48		30	2.13	127.8	0.46	0.53			
210°	25	--	--	--	--		16	0.72	43.2	0.46	0.54		25	1.68	100.8	0.44	0.51			
	30	12	0.40	24.0	0.46		17	0.75	45.0	0.43	0.49		27	1.84	110.4	0.42	0.48			
	35	13	0.45	27.0	0.44		18	0.81	48.6	0.41	0.48		28	1.99	119.4	0.42	0.48			
	40	14	0.49	29.4	0.41		19	0.86	51.6	0.39	0.45		30	2.12	127.2	0.39	0.45			
	45	14	0.51	30.6	0.43		20	0.91	54.6	0.38	0.43		30	2.25	135.0	0.41	0.48			
	50	15	0.57	34.2	0.42		21	0.98	58.8	0.37	0.42		30	2.37	142.2	0.43	0.50			
	55	15	0.59	35.4	0.43		21	1.01	60.6	0.38	0.44		30	2.49	149.4	0.46	0.53			
270°	25	--	--	--	--		16	0.87	52.2	0.44	0.50		25	2.19	131.4	0.45	0.52			
	30	12	0.48	28.8	0.43		17	0.95	57.0	0.42	0.49		27	2.37	142.2	0.42	0.48			
	35	13	0.53	31.8	0.40		18	1.03	61.8	0.41	0.47		28	2.55	153.0	0.42	0.48			
	40	14	0.63	37.8	0.41		19	1.10	66.0	0.39	0.45		30	2.73	163.8	0.39	0.45			
	45	14	0.67	40.2	0.44		20	1.17	70.2	0.38	0.43		30	2.89	173.4	0.41	0.48			
	50	15	0.72	43.2	0.41		21	1.23	73.8	0.36	0.41		30	3.06	183.6	0.44	0.50			
	55	15	0.75	45.0	0.43		21	1.30	78.0	0.38	0.44		30	3.22	193.2	0.46	0.53			
360°	25	--	--	--	--		16	1.20	72.0	0.45	0.52		25	2.88	172.8	0.44	0.51			
	30	12	0.69	41.4	0.46		17	1.28	76.8	0.43	0.49		27	3.15	189.0	0.42	0.48			
	35	13	0.77	46.2	0.44		18	1.37	82.2	0.41	0.47		28	3.40	204.0	0.42	0.48			
	40	14	0.84	50.4	0.41		19	1.48	88.8	0.39	0.46		30	3.64	218.4	0.39	0.45			
	45	14	0.88	52.8	0.43		20	1.57	94.2	0.38	0.44		30	3.86	231.6	0.41	0.48			
	50	15	0.98	58.8	0.42		21	1.68	100.8	0.37	0.42		30	4.07	244.2	0.44	0.50			
	55	15	1.01	60.6	0.43		21	1.74	104.4	0.38	0.44		30	4.27	256.2	0.46	0.53			

MP3500							90°							MP3500							180°							MP3500							210°						
Radius: 31' to 35' Adjustable Arc ● Light Brown: 90°							Radius: 31' to 35' Adjustable Arc ● Light Brown: 180°							Radius: 31' to 35' Adjustable Arc ● Light Brown: 210°							Radius: 31' to 35' Adjustable Arc ● Light Brown: 90°							Radius: 31' to 35' Adjustable Arc ● Light Brown: 180°													
Pressure PSI	Radius ft.	Flow GPM	Flow GPH	Precip in/hr ■ ▲	Radius ft.	Flow GPM	Flow GPH	Precip in/hr ■ ▲	Radius ft.	Flow GPM	Flow GPH	Precip in/hr ■ ▲	Radius ft.	Flow GPM	Flow GPH	Precip in/hr ■ ▲	Radius ft.	Flow GPM	Flow GPH	Precip in/hr ■ ▲	Radius ft.	Flow GPM	Flow GPH	Precip in/hr ■ ▲																	
25	33	1.04	62.4	0.37	0.42	33	2.21	132.6	0.39	0.45	33	2.59	155.4	0.39	0.45	34	2.84	170.4	0.41	0.47	34	3.08	184.8	0.44	0.51	34	3.29	197.4	0.44	0.51	35	3.54	212.4	0.48	0.55						
30	34	1.13	67.8	0.38	0.43	34	2.24	134.4	0.37	0.43	34	2.84	170.4	0.40	0.46	35	3.76	225.6	0.51	0.59	35	3.94	236.4	0.53	0.61	35	4.27	256.2	0.53	0.61	35	4.54	268.8	0.53	0.61						
35	34	1.21	72.6	0.40	0.47	34	2.65	159.0	0.44	0.51	35	3.10	186.0	0.49	0.56	35	3.76	225.6	0.51	0.59	35	3.94	236.4	0.53	0.61	35	4.27	256.2	0.53	0.61	35	4.54	268.8	0.53	0.61						
40	35	1.28	76.8	0.40	0.46	35	2.86	171.6	0.45	0.52	35	3.28	196.8	0.52	0.60	35	3.94	236.4	0.53	0.61	35	4.27	256.2	0.53	0.61	35	4.54	268.8	0.53	0.61	35	4.81	281.2	0.53	0.61						
45	35	1.38	82.8	0.43	0.50	35	3.10	186.0	0.49	0.56	35	3.76	225.6	0.51	0.59	35	4.27	256.2	0.53	0.61	35	4.54	268.8	0.53	0.61	35	4.81	281.2	0.53	0.61	35	5.08	294.0	0.53	0.61						
50	35	1.43	85.8	0.45	0.52	35	3.21	192.6	0.50	0.58	35	3.76	225.6	0.51	0.59	35	4.27	256.2	0.53	0.61	35	4.54	268.8	0.53	0.61	35	4.81	281.2	0.53	0.61	35	5.13	294.0	0.53	0.61						
55	35	1.50	90.0	0.47	0.54	35	3.28	196.8	0.52	0.60	35	3.94	236.4	0.53	0.61	35	4.27	256.2	0.53	0.61	35	4.54	268.8	0.53	0.61	35	4.81	281.2	0.53	0.61	35	5.13	294.0	0.53	0.61						

MP ROTATOR DESIGN GUIDE

MP Specialty

MP ROTATOR PERFORMANCE DATA



MP Corner

Radius: 8' to 15'
Adjustable Arc
● Turquoise: 45° to 105°

Arc	Pressure PSI	Radius ft.	Flow GPM	Flow GPH
45°	25	--	--	--
	30	12	0.17	10.2
	35	13	0.18	10.8
	40	14	0.19	11.4
	45	14	0.21	12.6
	50	14	0.22	13.2
	55	15	0.23	13.8
90°	25	11	0.31	18.6
	30	12	0.34	20.4
	35	13	0.36	21.6
	40	14	0.39	23.4
	45	14	0.41	24.6
	50	15	0.43	25.8
	55	15	0.46	27.6
105°	25	11	0.36	21.6
	30	12	0.39	23.4
	35	13	0.42	25.2
	40	14	0.45	27.0
	45	14	0.48	28.8
	50	15	0.51	30.6
	55	15	0.53	31.8

MP ROTATOR PERFORMANCE DATA



- **MPLCS515:** Ivory, MP Left Corner Strip
- **MPRCS515:** Copper, MP Right Corner Strip
- **MPSS530:** Brown, MP Side Strip

	Pressure PSI	Radius ft.	Flow GPM	Flow GPH
MP Left Corner Strip	30	4 x 14	0.19	11.4
	35	5 x 15	0.21	12.6
	40	5 x 15	0.22	13.2
	45	5 x 15	0.23	13.8
	50	6 x 16	0.25	15.0
	55	6 x 16	0.26	15.6
	30	4 x 14	0.19	11.4
MP Right Corner Strip	35	5 x 15	0.21	12.6
	40	5 x 15	0.22	13.2
	45	5 x 15	0.23	13.8
	50	6 x 16	0.25	15.0
	55	6 x 16	0.26	15.6
	30	4 x 28	0.38	22.8
	35	5 x 30	0.41	24.6
MP Side Strip	40	5 x 30	0.44	26.4
	45	5 x 30	0.47	28.2
	50	6 x 32	0.49	29.4
	55	6 x 32	0.51	30.6

Strip pattern radius can be adjusted by 25%.

MP Strips can be used with both the Standard MP Rotator and the MP800 depending on the layout.

PERFORMANCE DATA NOTE FOR ALL CHARTS:

Bold = Recommended Pressure.

The MP Rotator is designed to maintain matched precipitation after radius adjustment. Optimal pressure for the MP Rotator is 40 PSI. This can be achieved easily by using the MP Rotator with the Pro-Spray PRS40, pressure regulated at 40 PSI.

MP ROTATOR DESIGN GUIDE

Field Identification

MP Rotator models are color-coded for easy field identification.

Standard MP Rotator

Radius	8' to 15'	13' to 21'	22' to 30'	31' to 35'
Arc				
				
90° to 210°	MP1000-90	MP2000-90	MP3000-90	MP3500-90
				
210° to 270°	MP1000-210	MP2000-210	MP3000-210	
				
360°	MP1000-360	MP2000-360	MP3000-360	

MP800

Radius	6' to 12'	8' to 16'
Arc		
		
90° to 210°	MP800SR-90 Short Radius	MP815-90
		
210° to 270°		MP815-210
		
360°	MP800SR-360 Short Radius	MP815-360



MP Strip

Shape		
		MPLCS515 5' x 15' Left Corner
		
		MPRCS515 5' x 15' Right Corner
		
		MPSS530 5' x 30' Side Strip



MP Corner

Arc		
		45° to 105°

MP Male Threaded

Available in all MP Rotator models, except MP1000-210, MP3500-90, and MP800 models

	
	MP-HT Male-Threaded



Helping our customers succeed is what drives us. While our passion for innovation and engineering is built into everything we do, it is our commitment to exceptional support that we hope will keep you in the Hunter family of customers for years to come.

Gregory R. Hunter, CEO of Hunter Industries

Gene Smith, President, Landscape Irrigation and Outdoor Lighting

Website hunterindustries.com | **Customer Support** 1-800-383-4747 | **Technical Service** 1-800-733-2823

This brochure was printed on Forest Stewardship Council® (FSC®) certified paper with soy inks. The FSC is an international organization established to promote the responsible management of the world's forests.



Printed using
100% Wind
Energy, (RECs)

